**Fig. 1**

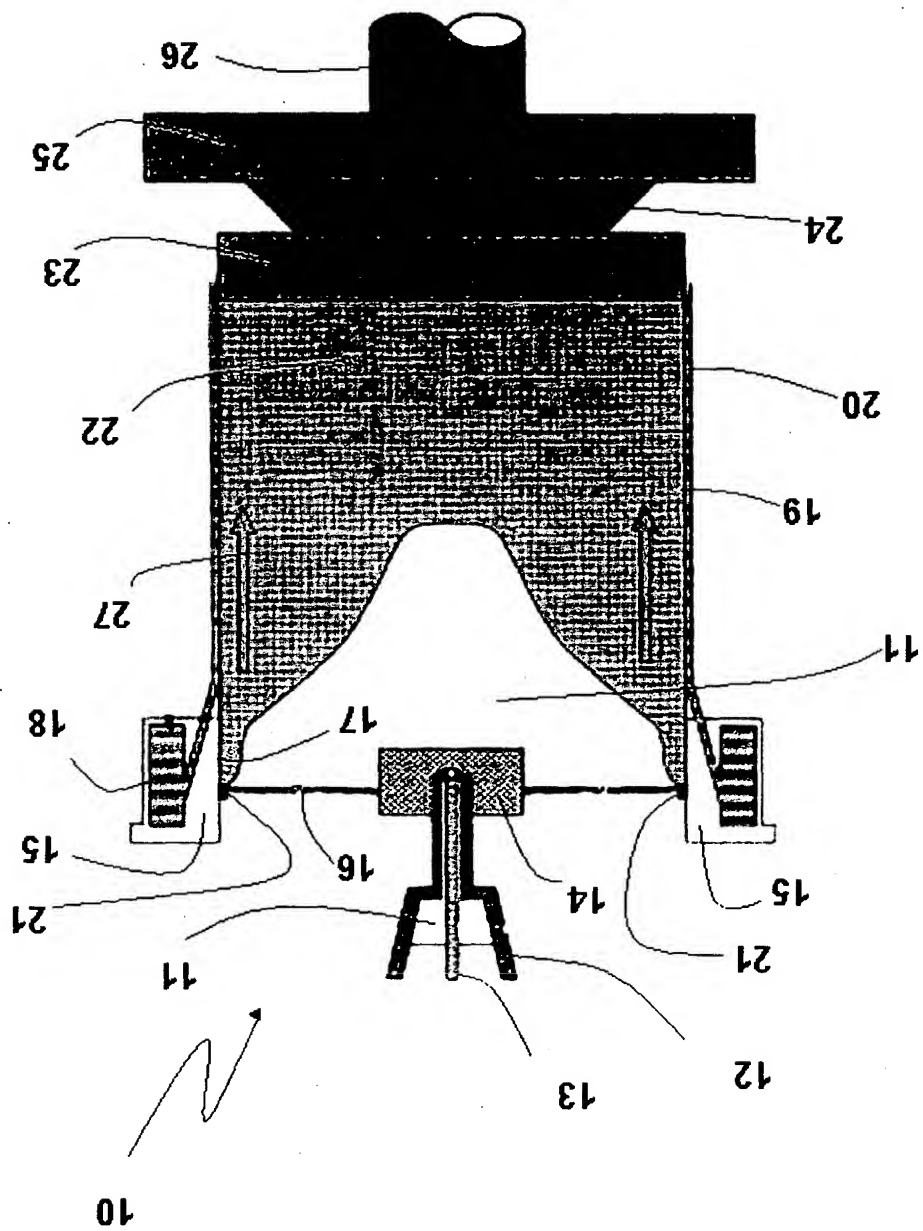


Fig. 2

Summary of AES-DP Oxide Thickness for 5182 Heated Treated with
Test Compound in Oil at 500°C for 12 hours in Air

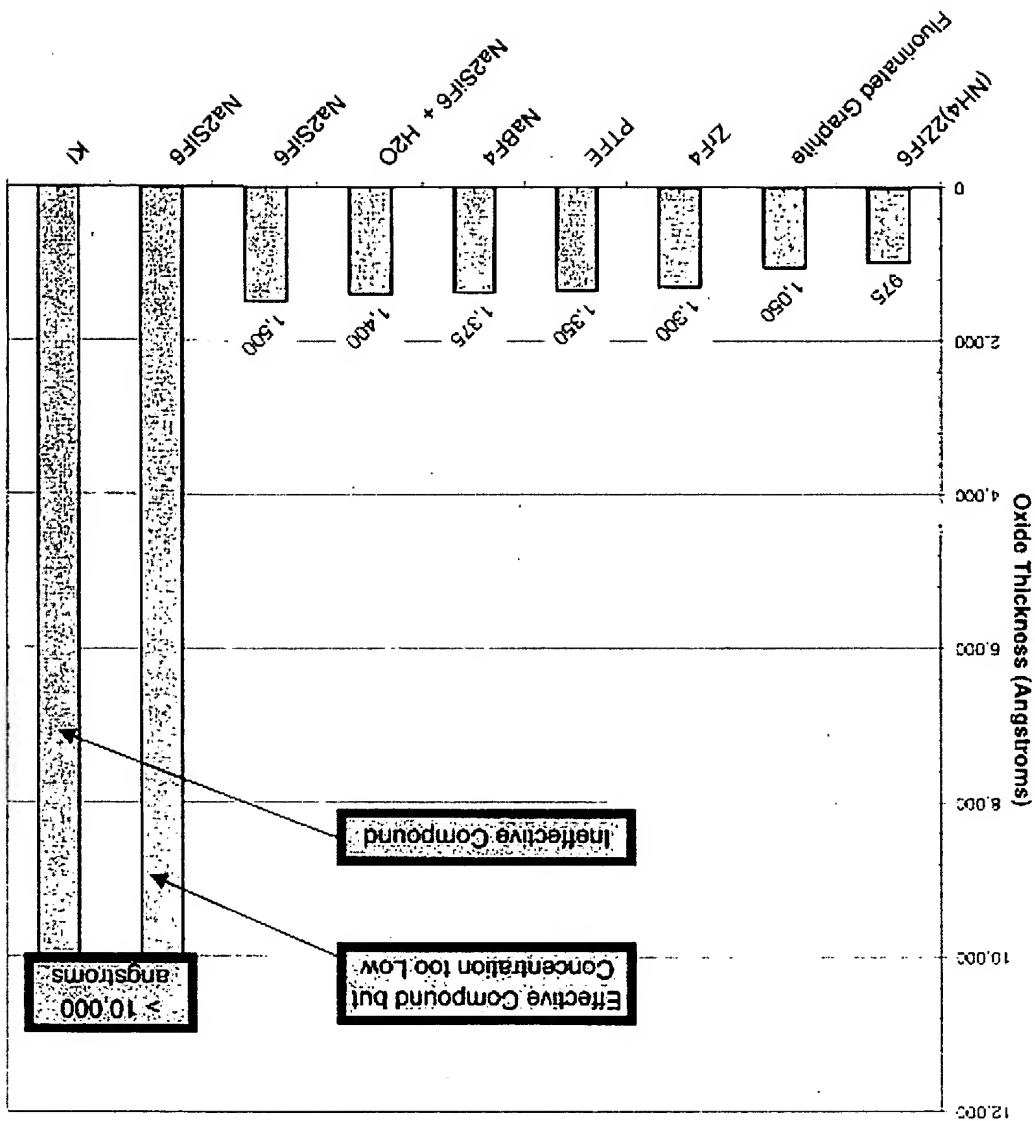


Fig. 3